




NTN-SNR BEARING RULMENTI S.R.L.

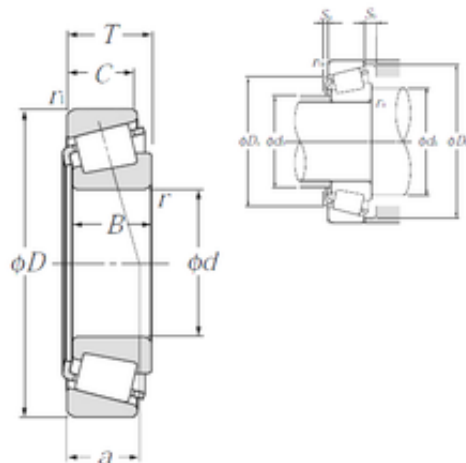

110 mm x 240 mm x 50 mm NTN 30322U
Single row tapered roller bearings

Bearing No. 30322U

30322U Bearing 2D drawings and 3D CAD models

Size	110x240x54.5 mm
Bore Diameter	110 mm
Outer Diameter	240 mm
Width	54,5 mm
d	110 mm
D	240 mm
T	54,5 mm
B	50 mm
C	42 mm
ra1 max.	2,5 mm
a	45,5 mm
r min.	4 mm
r1 min.	3 mm
da min.	128 mm
Da min	206 mm
Da max.	226 mm
db max.	141 mm
Db min.	222 mm
ra max.	3 mm
Sa	6 mm
Sb	12,5 mm
Weight	11,4 Kg
Basic dynamic load rating (C)	480 kN
Basic static load rating (C0)	590 kN
(Grease) Lubrication Speed	1 600 r/min



NTN-SNR BEARING RULMENTI S.R.L.

(Oil) Lubrication Speed	2 200 r/min
Calculation factor (e)	0,35
Calculation factor (Y0)	0,96
rs min	3 mm
r1s min	2.5 mm
e	0.35
Y2	1.74
Y0	0.96
Mass	11.4 kg
ISO 355 reference	T2GB110
Dynamic load, C	480 kN
Rating life coefficient, A2	1
Static load, C0	590 kN
Nlim (oil)	2,200 rpm
Nlim (grease)	1,600 rpm
Min operating temperature, Tmin	-40 ° C
Max operating temperature, Tmax	120 ° C
da max	128 mm
db min	141 mm
Da max	226 mm
Db min	222 mm
ra max	3 mm
r1a max	2.5 mm
Category	Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	11.098
EAN	4547359751796
Product Group	B04334